

ADA Roll in Shower APES6334BF75



Shower shown with factory installed accessories
Comes standard in white

63" x 34" x 78 3/4"
60" x 30" inside dimension

1 piece for new construction

3/4" threshold with pre-leveled reinforced base for easy installation.

Model includes:

- inside corner bar
- 2 molded soap ledges
- molded footledge
- frameless white hdpe fold up seat
- curtain rod and drain.

Accessories available:

- collapsible water retainer
- weighted shower curtain
- handheld shower glide bar kit with pressure balance valve.

Durable, luxurious and easy to clean gelcoat fiber-glass with tile look and diamond accents.


ADA compliant

Ready to ship within 72 hours.




ADA Roll in Shower (60" x 30" inside dimension)

SUBMITTAL DATA © 1999

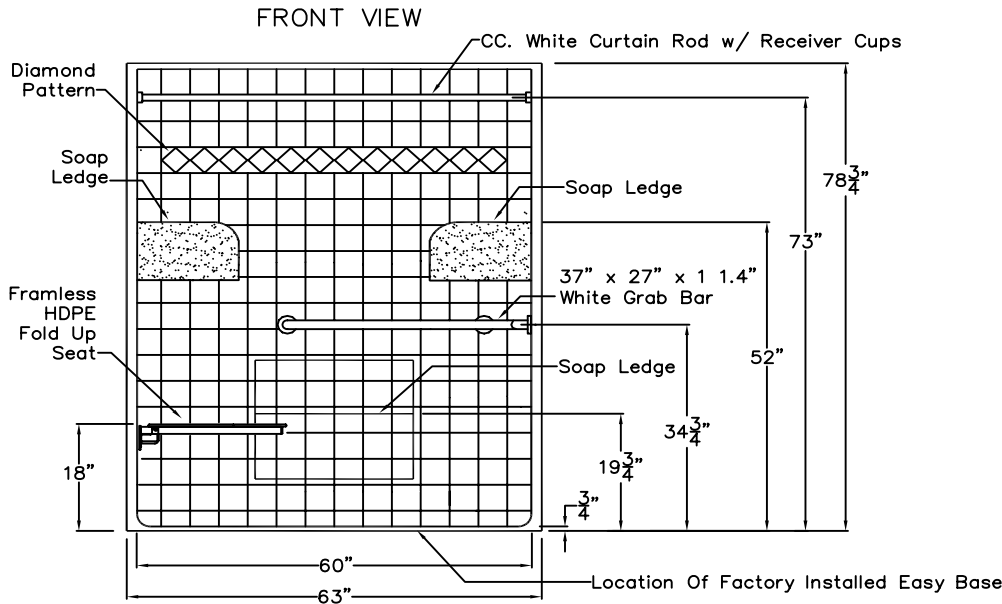

SIDE VIEW

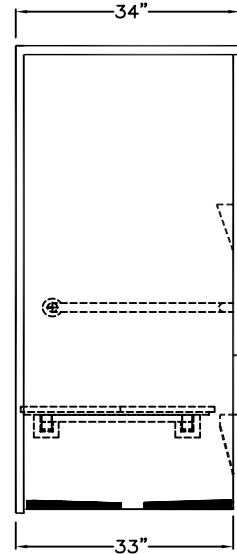

Roll-In Shower Stall

The shower enclosure shall be Accessibility Professionals Model APES6334BF75 center, right or left. Finished surface shall be of a sanitary-grade polyester Delcoat exhibiting a minimal thickness of 15 dry mills, and a finished cured Barcol hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of molded reinforced fiberglass with a 15% minimum fiberglass content. The unit shall have outside dimensions of 63" x 34" x 78 3/4". The base shall be attached to the sump of the unit in such a manner to form an integral part with an inner and outer coating of reinforced polyester resin. The unit shall meet ANSI 117.1, ANSI 124.2, ADA, TAS, HUD, BOCA, NAHB, UPC, and shall meet the requirements of Southern Building Code.

HANDED BY THE SEAT WALL. LEFT HAND SHOWN. RIGHT HAND AVAILABLE.

The enclosure shall be equipped with the following installed accessories:



- 1) one 37" x 27" x 1 1/4" diameter, CC. white grab bar with 1 1/2" statute clearance, mounted with stainless steel bolts and secured from the rear with a 3" x 3" 11 gauge metal mounting plate,
- 2) factory installed, full depth of stall, frameless white hdpe fold up seat,
- 3) molded soap ledges,
- 4) molded leg ledge,
- 5) tile finish,
- 6) one inch diameter, 18 gauge white curtain rod with receiver cups,
- 7) factory installed East Base self-sustaining bottom,
- 8) no caulk drain.

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 63" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS THAT ARE USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE ANY MORE THAN 3/4" ON EITHER SIDE.

THIS SHOULD NOT CREATE ANY TYPE OF INSTALLATION PROBLEMS EXCEPT FOR A DRY WALL ENCLOSED FIRE WALL INSTALLATION AREA THAT WOULD NOT ALLOW FOR ANY VARIATIONS. IN A STANDARD STUD/OPENING INSTALLATION THE EXTENSION OF THE HARDWARE SHOULD NOT CAUSE ANY TYPE OF PROBLEM.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR!

TOP VIEW

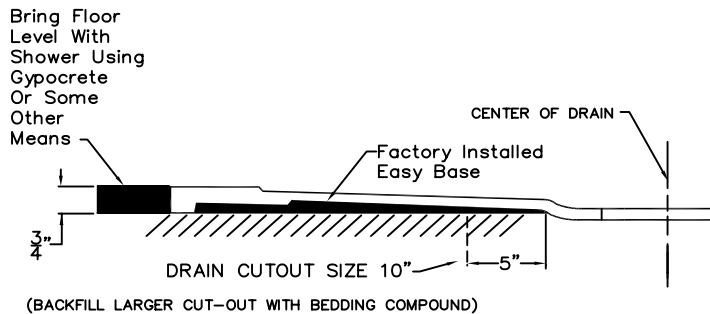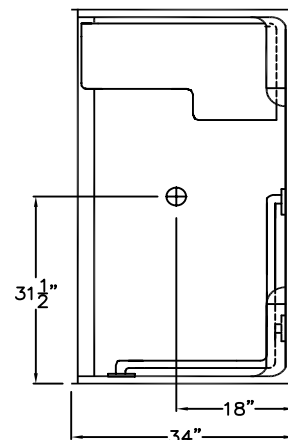

(BACKFILL LARGER CUT-OUT WITH BEDDING COMPOUND)

CROSS-SECTION OF THRESHOLD

DUE TO THE NATURE OF THE MATERIALS DIMENSIONS MAY VARY ± 1/2"

Drawing#: APES6334BF75	APES6334BF
Date: 6-22-07.	Revised: 2-29-08
Quote No.:	